



**NOTES:**


1. FOR GRAVITY APPLICATIONS ONLY.
2. ALL PROCEPTOR® UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS. PHYSICAL CHARACTERISTICS AND THICKNESS: POLYESTER RESIN AND E GLASS
3. ALL PROCEPTOR® UNITS ARE TO BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS INSTALLATION INSTRUCTION.
4. STANDARD PIPE STUBS ARE SOCKET SDR 35 PVC SEWER MATERIAL (SCHEDULE 40 ADAPTORS ADDED FOR ALL PROJECTS IN USA).
5. GMC/OMC/SMC 50 - 300 UNITS COME STANDARD WITH 4" INLET AND OUTLET (OTHER CUSTOM SIZES AVAILABLE AT EXTRA CHARGE).
6. EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE, CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL.
7. COVERS AVAILABLE FOR H20 TRAFFIC LOADING, PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION.
8. CONSULT GREEN TURTLE™ FOR OTHER SIZES.
9. 30 YEAR WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE.
10. U.S. PATENT #5,746,912; CDN PATENT #2,195,822

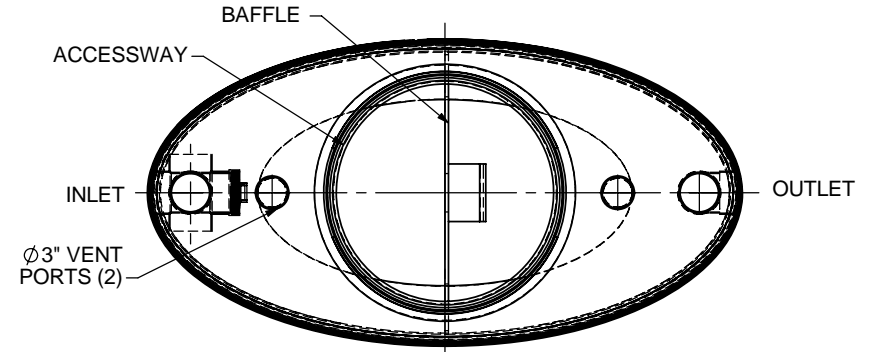


**TOP VIEW**

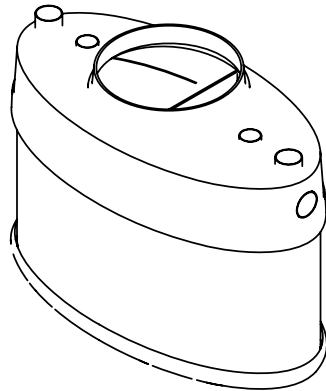

**ISOMETRIC VIEW**

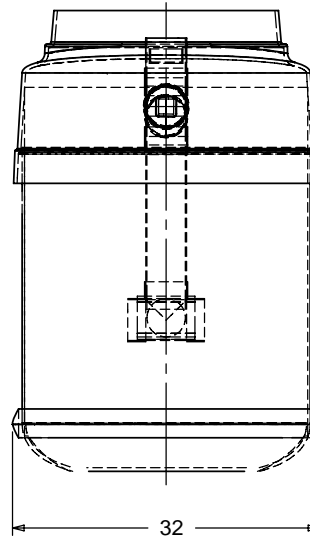

**SIDE VIEW**

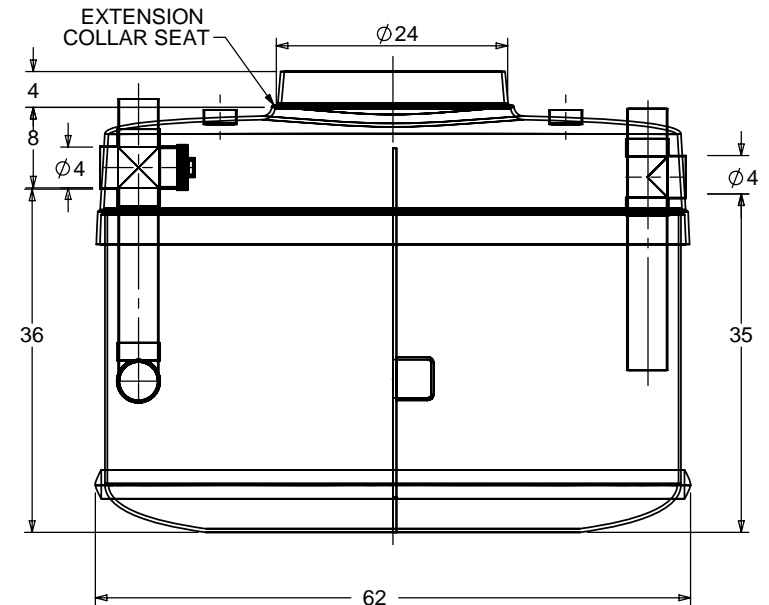

**FRONT VIEW**

TOTAL WET VOLUME: 200 GAL  
 MAX. GREASE CAPACITY: 90 GAL  
 MAX SOLIDS CAPACITY: 72 GAL

CONSULT LOCAL AUTHORITIES FOR MINIMUM SIZE OF SEPARATORS

TITLE: PROCEPTOR® F.O.G. SEPARATOR		REV	DATE	DRAWN
GMC 200 GALLON INTERCEPTOR		1		
4" INLET & OUTLET		2		
24" ACCESSWAY		3	JUNE 1, 2005	L. SIMKINS
ALL DIMENSIONS IN INCHES		4	OCTOBER 27, 2006	L. SIMKINS
PROJECT:	WO:	5	DEC. 13, 2006	L. SIMKINS
<input checked="" type="checkbox"/> OPTIONS:		6	JUNE 18, 2007	L. SIMKINS
GREASE SENSOR ALARM		7	NOVEMBER 3, 2009	L. SIMKINS
SUCTION PIPE FOR INDOOR INSTALLATION		8		
ABOVE GROUND INSTALLATION		9		
		10		
		DRAWN BY: F CHANDLER		
		DRAWN DATE 9/2/04		

**Proceptor®**  
 by greenturtle®  
 US 877 428 8187 CAN 877 966 9444  
 www.greenturtletech.com

SIZE	DWG. NO.	REV.
A	GMC 200	7
SCALE:1:20	DO NOT SCALE DRAWING	SHEET 1 OF 1