

GMC/OMC 1000(2), 1500(2), 2000, 2600 AND 3000 INSTALLATION DRAWING

NOTES:

- REFER TO INSTALLATION PROCEDURE AND INSTALLATION CHECKLIST.
- PROCEPTOR SEPARATORS MUST BE INSTALLED IN ACCORDANCE WITH ALL RELEVANT FEDERAL, PROVINCIAL/STATE, AND LOCAL CODES INCLUDING LOCAL PLUMBING CODE.
- US PATENT # 5,746,912; CDN PATENT # 2,195,822

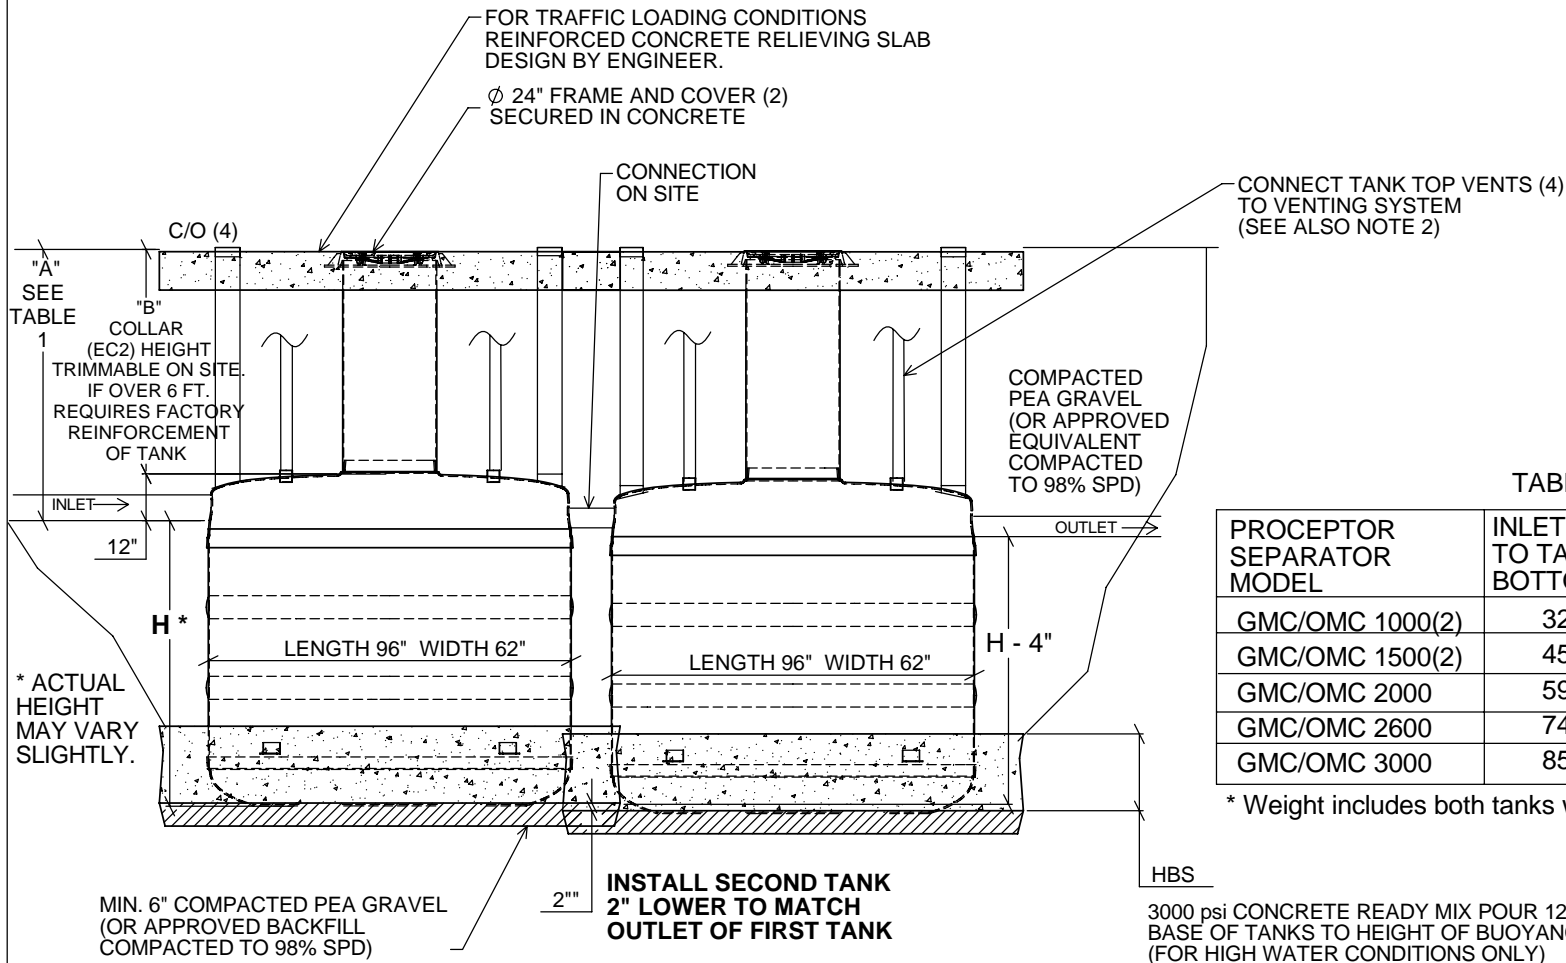


TABLE 2

PROCEPTOR SEPARATOR MODEL	INLET INVERT TO TANK BOTTOM (H*)	HEIGHT OF BUOYANCY SLAB (HBS)	DRY WEIGHT OF UNIT *
GMC/OMC 1000(2)	32"	18"	1000 lbs
GMC/OMC 1500(2)	45"	19"	1150 lbs
GMC/OMC 2000	59"	26"	1300lbs
GMC/OMC 2600	74"	35"	1490 lbs
GMC/OMC 3000	85"	41"	1610 lbs

* Weight includes both tanks without covers and collars

TABLE 1

BURIAL DEPTH	A	B
Max.	7 ft.	6 ft.
Min. with Traffic	36"	24"
Min. no Traffic	24"	** 12"

** MAY VARY DEPENDING ON VENT PIPING AND FLOOR SLAB

TITLE: PROCEPTOR OIL AND GREASE SEPARATOR		REV	DATE	DRAWN
INSTALLATION DRAWING FOR GMC/OMC MODELS 1000(2)-3000		1	SEPTEMBER 13, 2007	L. SIMKINS
ALL DIMENSIONS IN INCHES		2		
PROJECT: WO:		3		
OPTIONS:		4		
		5		
		6		
		7		
		8		
		9		
		10		
DRAWN BY: L. SIMKINS				
DRAWN DATE: JANUARY 31, 2007				

™

Proceptor

™

by greenturtle

US 877 428 8187 CAN 877 966 9444
www.greenturtletech.com

SIZE	DWG. NO.	REV.
A	INSTALL GMC/OMC 1000(2)-3000	1

SCALE: 1:60 DO NOT SCALE DRAWING SHEET 1 OF 1